



Espacenet

Bibliographic data: JP 6209996 (A)

INJECTOR WITH ISOLATION STRUCTURE


Publication date: 1994-08-02
Inventor(s): RARUFU FUAU BITSUDEINGERU +
Applicant(s): BECTON DICKINSON CO -
Classification: - **international:** **A61M5/28; A61M5/32;** (IPC1-7); A61M5/32
- **European:** A61M5/2853; A61M5/32B
Application number: JP19930318177 19931217
Priority number(s): US19920992958 19921218

Also published as:

- JP 2549620 (B2)
- US 5250037 (A)
- SG 43140 (A1)
- MX 9307738 (A)
- KR 970006092 (B1)
- more

Abstract of JP 6209996 (A)

PURPOSE. To obtain a subcutaneous injector which can connect a needle cannula to liquid in an injector cylinder and which can also separate a needle shield from the injector cylinder by a single efficient operation of an operating assembly having multiple cooperating cum means. **CONSTITUTION.** A subcutaneous injector 10 is equipped with an injector cylinder 12 to which a barrier 30 is mounted in a passage 28. The passage is connected to an accommodating chamber 24 for liquid between a tube end 18 and a tip end 26. Furthermore, at the tip end of the injector cylinder 12, there is mounted a movable needle cannula 60 for piercing through the barrier 30. In this case, an operating assembly having multiple cooperating cum means which contain at least a cum hole 42 is arranged; The assembly moves the needle shield 16 and separates from the injector cylinder 12 after the needle shield 16 and the needle cannula 60 are moved for a distance enough to pierce through the barrier 30 while the needle shield 16 is rotated against the injector cylinder 12.

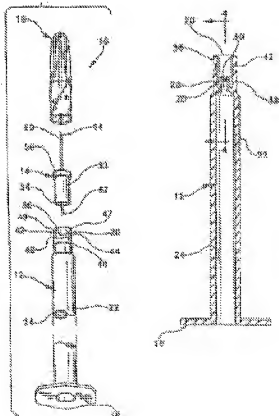

Last updated,
26.04.2011 Worldwide
Database 5.7.22.930